

TECHNICAL DATA


THE 10 PASSIVE ON WALL



Speaker Type	10" time-coherent point-source coaxial
Principle	Vented
Passive Active	Passive
Woofer	10" woofer
Tweeter	1 3/8" voice coil diameter, compression driver
Recommended ASCENDO Amplifiers	AIA2-1404, AIA2-2704, AIA4-2404, AIA8-2704, AIA8-6004
SPL (Peak / half space 2pi)	Measured Data 120 dB (Cont.) / 130 dB (Peak) 120 dB @ 100 Hz 130 dB @ 150Hz
Frequency Range	Measured Data (Without DSP) 100 Hz - 20 kHz / -3dB
Efficiency	91 dB / 1 W/m 4 pi, 97 dB / 1 W/m 2 pi
Power Handling	500 W
Impedance	8 Ω
Directivity Horizontal x Vertical in deg°	85° x 85°
Input Terminal	4-conductor Phoenix 12 AWG (3.3 mm ²)

Enclosure	Internally braced MDF
Dimensions (W/H/D)mm (Without grille)	300 500 145 (With grille: 154)
Dimensions (W/H/D)inch (Without grille)	11 13/16 19 11/16 5 11/16 (With grille: 6 1/16)
Packing Dimensions (W/H/D)mm	440 640 280
Packing Dimensions (W/H/D)inch	17 5/16 25 13/16 11 1/16
Weight	26.46 lbs 12.0 kg
Gross Weight	30.86 lbs 14.0 kg
Finish	Matte black / White glossy
Mounting	4 x wall brackets for horizontal and vertical installation + VESA 100 x 100 mounting points

The THE10 PASSIVE ON WALL is supplied with a front cover as standard

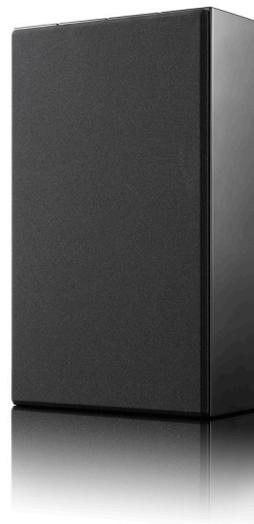

Technical modifications subject to change without further notice | Technische Änderungen vorbehalten